
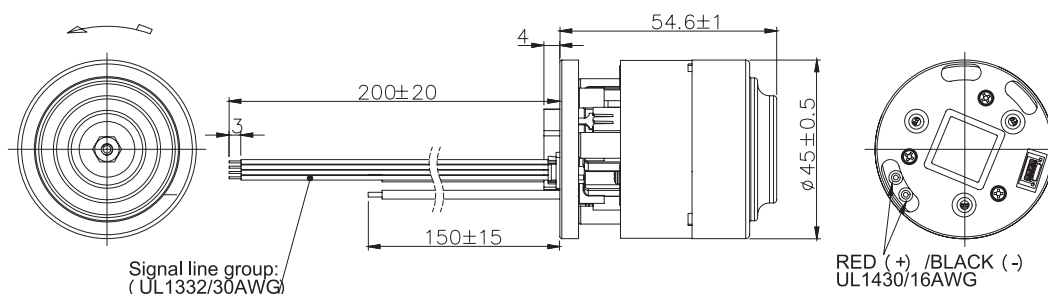


无刷电机

RB-4510-32

用途：
吸尘器


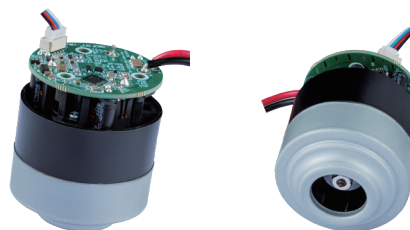


MODEL	PERFORMANCE PARAMETER					
	OPERATING RANGE"	NOMINAL	SPEED	CURRENT	EFFICIENCY	OUTPUT
			rpm	A	%	W
RB-4510C05-32-N-01	6.0V-9.0V	7.2V CONSTANT	65000±3000	11	≥50	80
RB-4510C01-32-N-02	9.0V-16.0V	10.8V CONSTANT	80000±3000	12	≥50	130
RB-4510C03-32-N-03	9.0V-16.0V	12.0V CONSTANT	80000±3000	10	≥50	130
RB-4510C02-32-N-04	12.0V-17.0V	14.4V CONSTANT	93500±3000	17	≥50	240

马达出轴长度与性能参数，以及 EMC 对策可依客户需求调整，详情请洽业务。

RB-5510-32

用途：
吸尘器

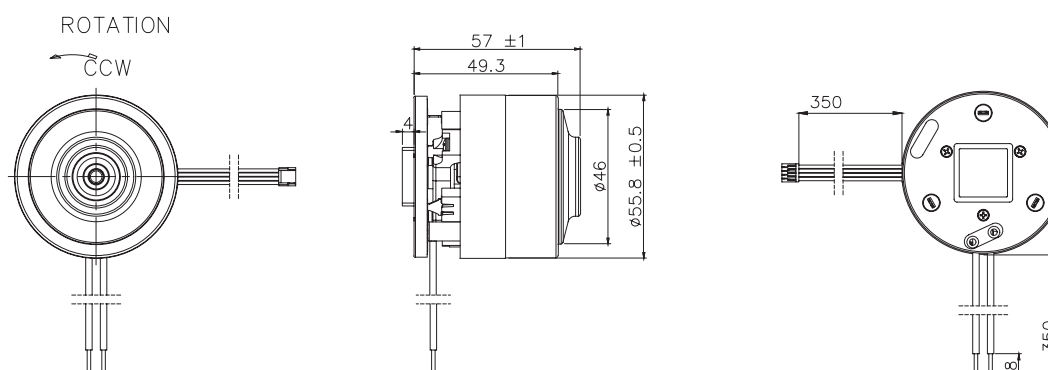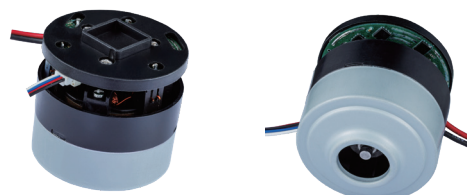

MODEL	PERFORMANCE PARAMETER					
	OPERATING RANGE"	NOMINAL	SPEED	CURRENT	EFFICIENCY	OUTPUT
			rpm	A	%	W
RB-5510-32-N-01	17.0V-26.0V	18.0V CONSTANT	80000±3000	21.1	≥50	380
RB-5510-32-N-02	17.0V-26.0V	21.6V CONSTANT	80000±3000	17.5	≥50	380

马达出轴长度与性能参数，以及 EMC 对策可依客户需求调整，详情请洽业务。