
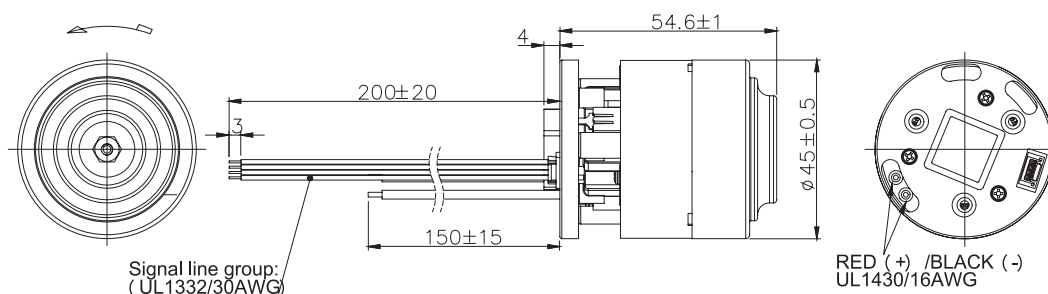


# RB-4510-32

用途：  
吸尘器


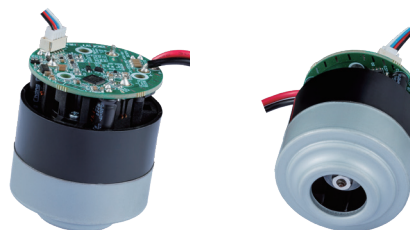


| MODEL              | PERFORMANCE PARAMETER |                |            |         |            |        |
|--------------------|-----------------------|----------------|------------|---------|------------|--------|
|                    | OPERATING RANGE"      | NOMINAL        | SPEED      | CURRENT | EFFICIENCY | OUTPUT |
|                    |                       |                | rpm        | A       | %          | W      |
| RB-4510C05-32-N-01 | 6.0V-9.0V             | 7.2V CONSTANT  | 65000±3000 | 11      | ≥50        | 80     |
| RB-4510C01-32-N-02 | 9.0V-16.0V            | 10.8V CONSTANT | 80000±3000 | 12      | ≥50        | 130    |
| RB-4510C03-32-N-03 | 9.0V-16.0V            | 12.0V CONSTANT | 80000±3000 | 10      | ≥50        | 130    |
| RB-4510C02-32-N-04 | 12.0V-17.0V           | 14.4V CONSTANT | 93500±3000 | 17      | ≥50        | 240    |

马达出轴长度与性能参数，以及 EMC 对策可依客户需求调整，详情请洽业务。

# RB-5510-32

用途：  
吸尘器

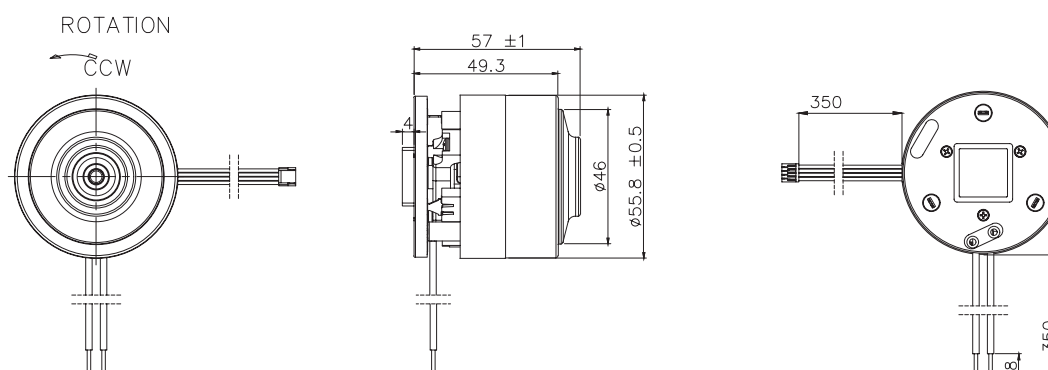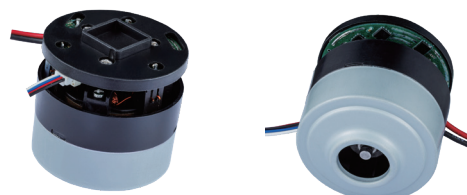

| MODEL           | PERFORMANCE PARAMETER |                |            |         |            |        |
|-----------------|-----------------------|----------------|------------|---------|------------|--------|
|                 | OPERATING RANGE"      | NOMINAL        | SPEED      | CURRENT | EFFICIENCY | OUTPUT |
|                 |                       |                | rpm        | A       | %          | W      |
| RB-5510-32-N-01 | 17.0V-26.0V           | 18.0V CONSTANT | 80000±3000 | 21.1    | ≥50        | 380    |
| RB-5510-32-N-02 | 17.0V-26.0V           | 21.6V CONSTANT | 80000±3000 | 17.5    | ≥50        | 380    |

马达出轴长度与性能参数，以及 EMC 对策可依客户需求调整，详情请洽业务。