


有刷电机

RS-2838SS

用途：
吹风机、电动理发器、按摩仪、智能家电、吸尘器、智能扫地机、
智能电动车、智能遥控模型

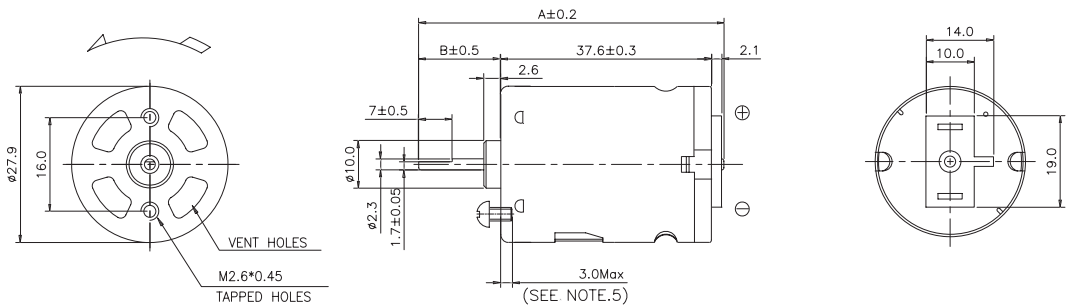

MODEL	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY						STALL	
	OPERATING RANGE	NOMINAL	SPEED	CURRENT	SPEED	CURRENT	TORQUE		OUTPUT	EFF	TORQUE	
			rpm	A	rpm	A	g.cm	mN-m	W	%	g.cm	mN-m
RS-28385SS-2360	6.0~24.0	12.0V CONSTANT	12000	0.19	10210	0.98	66.2	6.49	6.94	59	407	39.90
RS-28385SS-16125	24.0-48.0	41.0V CONSTANT	20000	0.13	16672	0.66	110.9	10.87	19	70.2	867	85.00
RS-28385SS-17100	12.0-24.0	24.0V CONSTANT	15500	0.13	12850	0.63	80.5	7.89	10.6	70.1	470	46.08
RS-28385SS-2073	12.0-24.0	24.0V CONSTANT	22000	0.21	18460	1.1	89	8.73	16.8	63.5	550	53.92

马达出轴长度与性能参数，以及 EMC 对策可依客户需求调整，详情请洽业务。

